

▶ **SPEED**

UltraFreeze™ opens at up to 100 inches per second.

▶ **CONTROLS**

Albany's UltraSmart™ Controller is people friendly and extremely intuitive. Control box includes an integrated rotary disconnect standard.

▶ **VISIBILITY**

Optional 17" X 17" or 24" X 24" windows available.

▶ **PANEL MATERIAL**

Two ply monofilament standard with three ply monofilament and vinyl panels optional. Blue and yellow standard.

▶ **MAINTENANCE**

The self-repairing UltraFreeze™ is designed to be low maintenance and cycle hundreds of thousands of times.

▶ **BACSEAL™ WEATHER SEAL**

The UltraFreeze™ seal is unmatched. The top header and side frames are sealed tight.

▶ **ULTRADEFROST™ SYSTEM**

UltraDefrost™ system keeps frost off of the door panel.

▶ **WIRELESS SAFETY SYSTEM**


Eliminate coil cords with Albany's patent pending wireless safety system.

Albany Door Systems' self-repairing UltraFreeze™ door is designed for high traffic cold storage freezer applications where the need for speed is paramount. When fork-truck traffic is high, door speed is important, climate control is critical, energy efficiency is essential, and safety concerns are at a premium, Albany's UltraFreeze™ is the solution.



ULTRAFREEZE™

Albany's self-repairing UltraFreeze™ high speed cold storage doors are tough, built to last, and engineered to cycle hundreds of thousands of times.

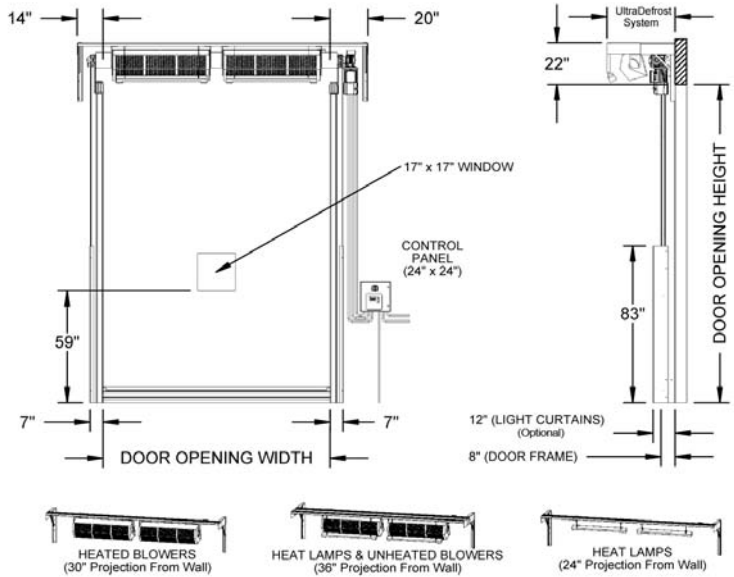

BacFlap™ Auto-Reset System

When impacted, the door panel can be reset without tools. BacFlaps™ insure against panel tearing.




BacLight™ Safety System (Optional)

Albany's exclusive safety light barrier projects a curtain of light approximately six feet tall across both sides of the door panel to prevent injuries.



UltraSmart™ Controller

UltraSmart™ walks you through problems on the control screen. Modular design minimizes cost, improves reliability, and offers scalability for future upgrades.




Patent Pending Modular Design

The Albany patent pending extrusion design allows for easy maintenance and repair in the field.



BacOut™ Safety System (Optional)

Counter-Balance design allows the door to be manually raised in the event of a power failure. No manual cranks in the event of an emergency. Availability depends on door size.




BacTrack™ Soft Bottom Bar (Optional)

Fully padded safety bottom bar that automatically resets after impact. Self-repairing.



UltraDefrost™ System (Optional)

Optional Light and Blower systems help to keep frost off of the door panel. Modulating control system decreases energy costs.



BacSeal™ Weather Seal

Double seal on the back spreader bar and double seal on the front extrusions. When the door is down, the panel is sealed.



Wireless Safety System

Cut your cord with Albany's patent pending Wireless Safety System and eliminate costly repairs and downtime associated with coil cords.